

Auditorium Series EXIT Lights

Special Application EXIT Light in Black body Auditorium EXIT Light For Cinema Theater
Also Available in three level of safety mains operated, Battery Operated and Photo luminescent Modes.

LED EL/M (A)

Maintained
3 hrs. Backup
LED
Ni-Mh, Ni-Cd Rechargeable Battery
10 to 12 hrs. Recharging Period
Constant Voltage Charger
Photoluminescent

111 EL/M (A)


Maintained
3 hrs. Backup
1 x 11 W CFL
SLA Rechargeable Battery
10 to 12 hrs. Recharging Period
Constant Voltage Charger
Photoluminescent

111 EL/NE (A)

Non-Emergency
1 x 11 W CFL

111 EL/NM (A)

Non-Maintained
3 hrs. Backup
1 x 11 W CFL

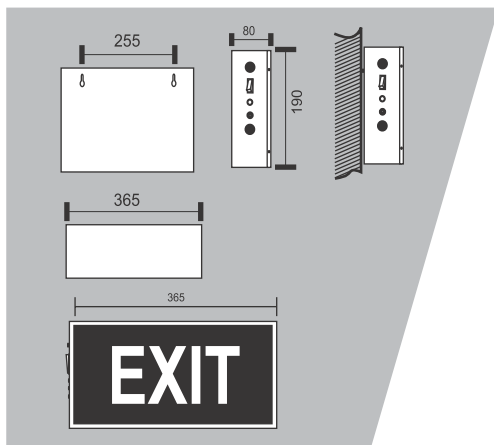

- Conforms to IS : 9583 - 1981
- Battery Duration $\pm 10\%$
- Red LED "ON" Indicates Charging
- Green LED "ON" Indicates Standby Mode
- 22 SWG CRCA Powder Coated Housing
- 230 V, 50 Hz (Other Available)
- Also Available with Higher Backup

SELF CONTAINED

RECHARGEABLE EMERGENCY

EMERGENCY LIGHTS



Auditorium Series EXIT Lights

Special Application EXIT Light in Black body Auditorium EXIT Light For Cinema Theater
Also Available in three level of safety mains operated, Battery Operated and Photo luminescent Modes.

LED EL/M/A (R)

Maintained

3 hrs. Backup

5 W LED

Ni-Mh / Ni-Cd Rechargeable Battery

10 to 12 hrs. Recharging Period

Constant Voltage Charger

111 EL / M / A (R)

Maintained

3 hrs. Backup

1 x 11 W CFL

111 EL / NM / A (R)

Non-Maintained


3 hrs. Backup

1 x 11 W CFL

111 EL / NE / A (R)

Non-Emergency

1 x 11 W CFL

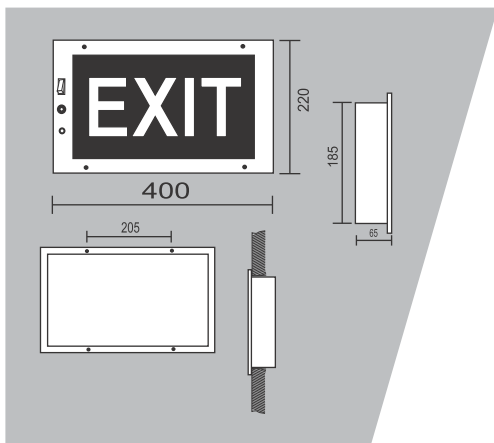

SELF CONTAINED
RECHARGEABLE EMERGENCY
EMERGENCY LIGHTS

- Conforms to IS : 9583 - 1981
- Battery Duration + 10%
- Red LED "ON" Indicates Charging
- Green LED "ON" Indicates Standby Mode
- 22 SWG CRCA Powder Coated Housing
- 230 V, 50 Hz (Other Available)
- Also Available with Higher Backup



Auditorium Series EXIT Lights

Special Application EXIT Light in Black body Auditorium EXIT Light For Cinema Theater
Also Available in three level of safety mains operated, Battery Operated and Photo luminescent Modes.


LED ETL / M (A)

Maintained
2 hrs. Backup
1 x 9 W LED

SLA Rechargeable Battery
16 to 24 hrs. Rechargeable Period
Constant Current Charger

LED ETL / NE (A)

Non-Emergency
Battery Backup (N/A)
1 x 9 W LED

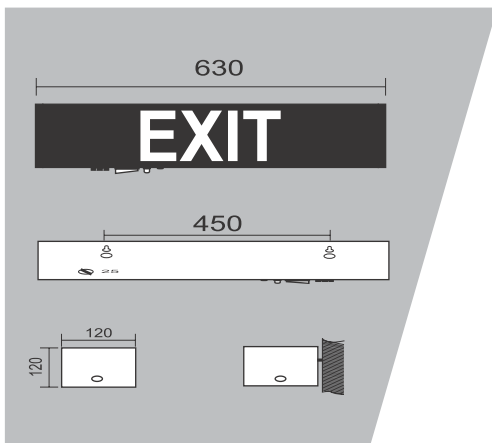

SELF CONTAINED
RECHARGEABLE EMERGENCY
EMERGENCY LIGHTS

- Conforms to IS : 9583 - 1981
- Battery Duration $\pm 10\%$
- Red LED "ON" Indicates Charging
- Green LED "ON" Indicates Standby Mode
- 22 SWG CRCA Powder Coated Housing
- 230 V, 50 Hz (Other Available)
- Also Available with Higher Backup