


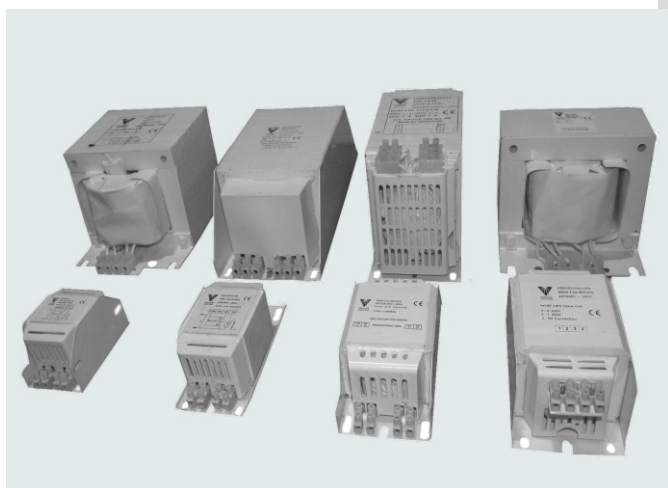

Also available in Class H Insulation

Class 'B' Ballast

Wattage	Part No	Lamp Type	Nominal Rated Voltage	Lamp Current (A)	Dimension (LxWxH)
50	DHSK05-V	MH	220 / 240	0.76	104 x 69 x 56
70	DHSK07-V	MH / SV	220 / 240	1.00	104 x 69 x 56
80	DMP08-V	MH / MV	220 / 240	0.80	105 x 69 x 56
100	DHSK10-V	MH	220 / 240	1.10	106 x 69 x 56
125	DMP12-V	MH / MV	220 / 240	1.15	106 x 69 x 56
150	DHSK15-V	MH / SV	220 / 240	1.80	140 x 69 x 56
200	DHMK20-V	MH	220 / 240	1.63	135 x 68 x 56
250	DHSD25-V	MH / SV	220 / 240	3.00	140 x 77 x 57
250	DHMD25-V	MH / MV	220 / 240	2.15	123 x 77 x 64
320	DHMA32B-V	MH	230 / 240	2.63	167 x 85 x 72
350	DHMK35-V	MH	220 / 240	2.80	137 x 84 x 64
400	DHSD40-V	MH / SV	220 / 240	4.20	140 x 86 x 72
400	DHMD40-V	MH / MV	220 / 240	3.25	140 x 77 x 57
600	DHSD60-V	MH / SV	220 / 240	6.20	150 x 99 x 81
1000	DHDP1K-V	MH / SV	210/220/230/240	9.5/10.3	190 x 120 x 105
1500	DHMOV02-V	MH	380/400/415	6.70	215 x 150 x 126
2000	DHZV943-V	MH	380/400/415	10.3	215 x 150 x 126
2060	DHZV944DY-V	MH	380/400/415	12.2	230 x 150 x 126

Features

- Vacuum Pressure Impregnated
- Precision Wound Coils
- Higher efficiency
- Reduced current crest factor
- Longer life
- Optimized lamp performance
- Optional Thermal cut-out
- Available in all HID ranges

Class 'H' Ballast

Wattage	Part Code	Description	Input Volts	Lamp Current (A)	Dimension (LxWxH)
70	DHSK07H-V	MH / SV	220 / 240	1.00	104 x 69 x 56
80	DMP08H-V	MH / MV	220 / 240	0.80	105 x 69 x 56
125	DMP12H-V	MH / MV	220 / 240	1.15	106 x 69 x 56
150	DHSK15H-V	MH / SV	220 / 240	1.80	140 x 69 x 56
250	DHSD25H-V	MH / SV	220 / 240	3.00	140 x 77 x 65
250	DHMD25H-V	MH / MV	220 / 240	2.15	123 x 77 x 65
400	DHSD40H-V	MH / SV	220 / 240	4.20	140 x 86 x 72
400	DHMD40H-V	MH / MV	220 / 240	3.25	140 x 77 x 57